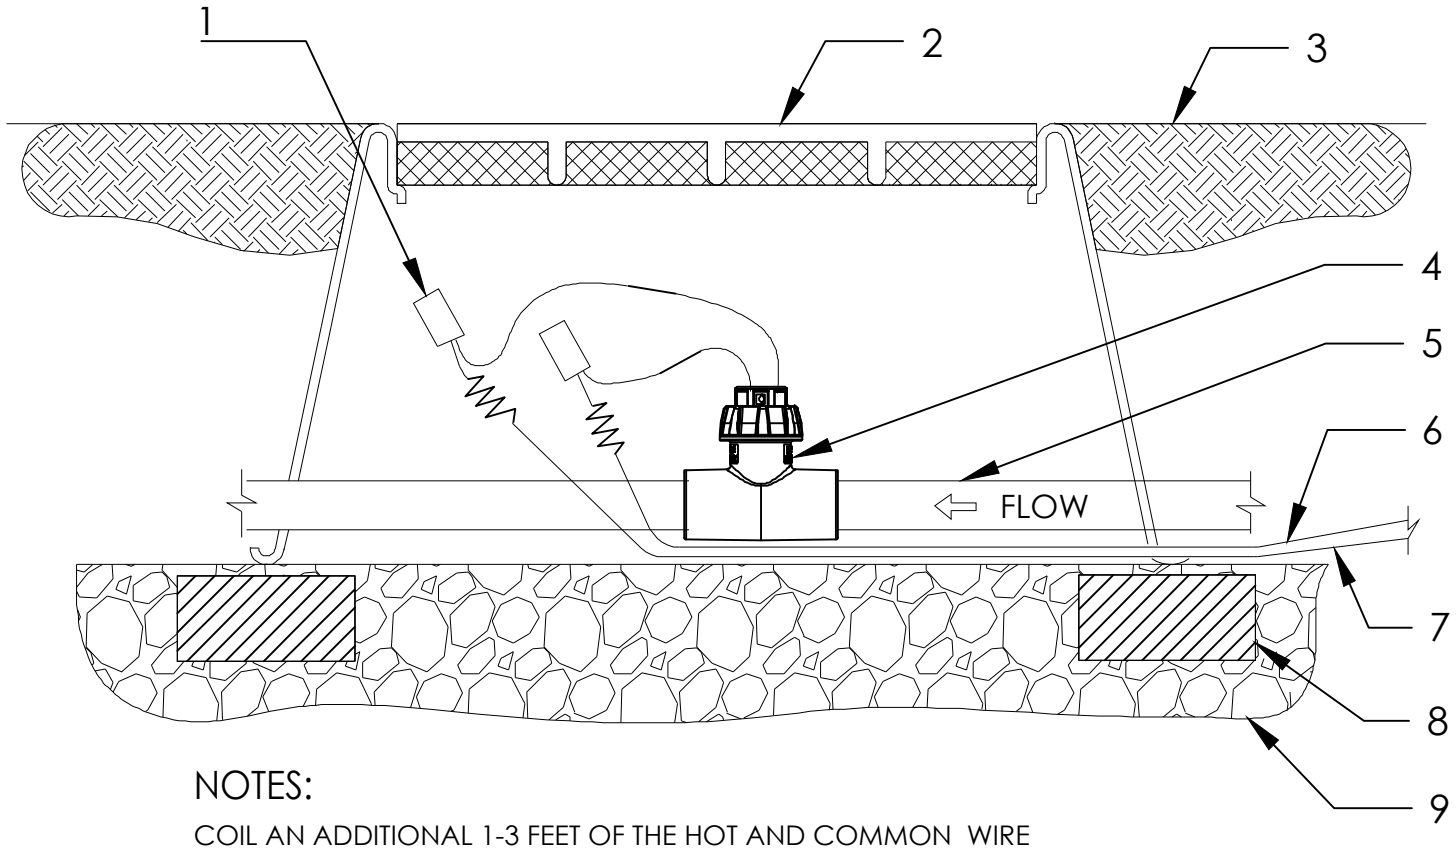

LEGEND

1. DRY SPLICE WATERPROOF WIRE CONNECTORS
2. 12" VALVE BOX WITH COVER
3. FINISH GRADE
4. DIG FLOWLINK SENSOR T ASSEMBLY
   - 4.1. MODEL FST-075 $\frac{3}{4}$"
   - 4.2. MODEL FST-100 1"
   - 4.3. MODEL FST-150 1 $\frac{1}{2}$"
   - 4.4. MODEL FST-200 2"
5. PVC MAIN LINE
6. SENSOR HOT (RED) COILED WIRE TO THE 170S-XXX REMOTE CONTROL VALVE OR MASTER VALVE
7. SENSOR COMMON (WHITE) COILED WIRE TO THE 170S-XXX REMOTE CONTROL VALVE OR MASTER VALVE
8. BRICK SUPPORT AT EACH CORNER
9. PEA GRAVEL SUMP MINIMUM 3"

NOTES:

COIL AN ADDITIONAL 1-3 FEET OF THE HOT AND COMMON WIRE INSIDE THE VALVE BOX FOR EASY SERVICE
A MINIMUM STRAIGHT LENGTH OF PIPE 10X DIAMETER OF PIPE ON INLET AND 5X DIAMETER OF PIPE ON OUTFLOW SIDE REQUIRED FOR INSTALLATION

4 FLOW SENSOR PVC SLIP T ASSEMBLY MOUNTING FOR LEITLINK CONTROLLER

FST-075 3/4" , FST-100 1", FST-150 1-1/2" AND FST-200 2"

NOT TO SCALE
9-5-2024