LEGEND

1. DRY SPLICE CONNECTORS WITH BRASS CLAMPS
2. VALVE BOX WITH COVER 12" SIZE
3. FINISH GRADE TOP
4. DIG FLOWLINK™ FLOW SENSOR T ASSEMBLY WITH HOT (RED) AND COMMON (WHITE) WIRES
   - 4.1. MODEL FST-150 1-1/2
   - 4.2. MODEL FST- 200 2"
5. DIG REMOTE CONTROL VALVE WITH FLOW CONTROL AND LEMA 170S DIGITAL SOLENOID ACTUATOR WITH HOT (RED) AND COMMON (WHITE) WIRES
   - 5.1. MODEL LEMA 170S-150 1-1/2"
   - 5.2. MODEL LEMA 170S- 200 2"
6. HOT (RED) AND COMMON (WHITE) COILED WIRE TO SENSORS INCLUDING FLOW SENSOR CONNECTIONS
7. PVC SCHEDULE 40 MALE ADAPTER
8. PVC MAIN LINE
9. HOT (RED) COILED WIRE TO SENSORS INCLUDING FLOW SENSOR CONNECTIONS
10. HOT (RED) COMMON (WHITE) COILED WIRES TO CONTROLLER
11. BRICK SUPPORT AT EACH CORNER
12. PEA GRAVEL SUMP MINIMUM 3"
13. PVC SCHEDULE 40 ELBOW

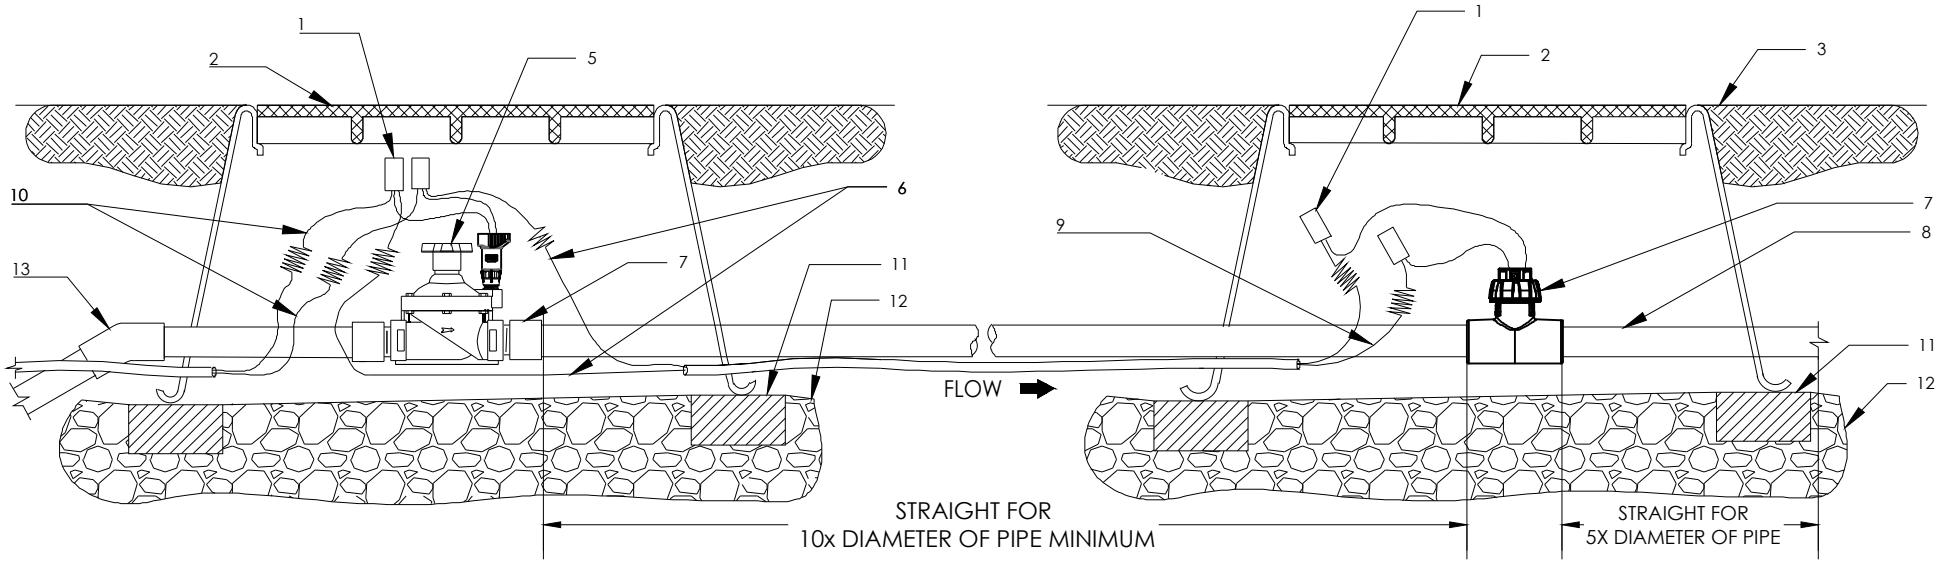

NOTE:

COIL AN ADDITIONAL 1-3 FEET OF THE HOT AND COMMON WIRE INSIDE THE VALVE BOX FOR EASY SERVICE

6 FLOWLINK™ FLOW SENSOR PVC, T SLIP ASSEMBLY & LEMA 170S VALVE WIRE LAYOUT TO LEITLINK™ CONTROLLER FST-150 1-1/2", FST-200 2"

NOT TO SCALE
9-11-2024